



Bobcat®

Zero-Turn Mowers



One Tough Animal.



POWERING DEALER SUCCESS

INTRODUCING THE NEW BOBCAT MOWERS

This industry is all about creating a good impression. Your equipment should do the same.

Whether it's your clients or your family, people look to you to keep their environment looking its best. They can be confident in you – because you can be confident in Bobcat.

The new Bobcat mower lineup delivers the durability, ease of ownership and quality of cut that pros demand and homeowners aspire to own.

The Bobcat brand is all about delivering the performance you need when you need it, making you totally confident in your ability to meet your clients' demands.

EASE OF OWNERSHIP

From the optimum user-experience, and feel of the controls as you mow down a tough challenge, to the best in class serviceability and warranty, Bobcat has every detail nailed down giving you more comfort, fewer hassles and acres of perfectly maintained turf every season.

- Intuitive, comfortable operator controls
- Comfortable operation
- Easy serviceability
- Zero-T tires
- Optional no-flat caster wheels (standard on ZT7000)
- Excellent fuel capacity
- Operator comfort and efficiency

DURABILITY

Whether your goal is to increase your profit or free-up some personal time, your mower should be ready to work when you are, and it should stay ready for the next job with a minimal amount of care and maintenance. Bobcat mowers are designed to roll with the challenges of every job – and work as hard as the people that use them.

- Tough spindle assemblies
- High-strength designs
- Tough, tubular frames
- Durable mower decks
- Hydrostatic transaxles

QUALITY OF CUT

Stunning results are what it's all about, and stunning results are what you'll get when doing work with a Bobcat mower. From its tough and well-designed mower decks to its even clipping dispersal and remarkable deck cleanliness, this mower is made to turn heads.


- AirFX™ cutting system with Air-Gap baffles
- DuraDeck cutting system
- TufDeck™ and TufDeck Pro™ cutting system
- Extra large discharge chutes
- Steel fabricated spindle assembly
- Bolt-on, replaceable baffles
- Bull-nose front decks

BOBCAT ZERO-TURN MOWER OFFERING

Bobcat is launching its zero-turn mowers with an extensive 12-machine lineup, covering the needs of both commercial and residential customers. Deck sizes range from 42 inches to 72 inches.

BOBCAT NAMING CONVENTION

Model numbers for Bobcat zero-turn mowers are based on several characteristics of the machine.

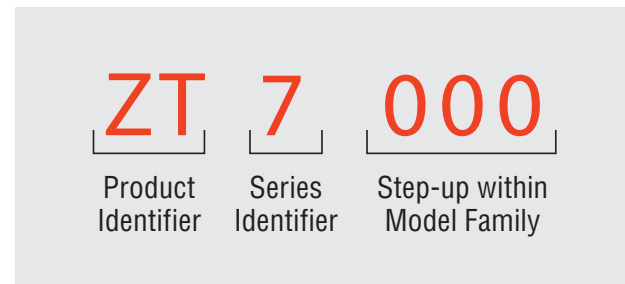

- ZT is the product identifier, where ZT is a zero-turn mower.
- The first number represents the series.
- The second number represents a step-up within that series.
- The third and fourth numbers are generation numbers, with a 0 representing the current line-up and 1-9 reserved for future expansion.

CUSTOMER PROFILE



Landscapers, Heavy-Duty Mowing Service

These professional customers require a commercial zero-turn mower and typically operate 8-10 hours each day.

Light-Duty Mowing Service

Full- or part-time professionals who usually operate a small number of zero-turn mowers.

HOWA, Municipality, School, etc.

These owners have more than two acres. May operate up to 10 hours per week.

Residential

Residential customers spend approximately 2-5 hours per week operating their mower.

Residential Mowers

ZT2000: Mow like a pro with Bobcat power and performance – at an affordable price.

The ZT2000 gives you professional-grade mowing power with hours of fuel capacity for big and small lots alike.

FR Series Engines

Get commercial-grade performance with a powerful Kawasaki® FR651V or FR691V engine.

Available Deck Widths

- 42 inch
- 48 inch
- 52 inch

Accessories

- ECO Plate – excellent for debris control around landscape beds, along sidewalks and roads
- Grass Catcher: Poly-dump, 3.75 or 5.0 bushel
- Laser edge blades
- Magnetic light kit
- Mulching baffle kit
- No-flat caster wheel
- Striping kit
- Suspension kit
- ROPS kit
- ZT hitch kit

ZT3000: Professional-style performance to get the job done – no matter your property size

With its powerful engine, professional cut and finish, plus effortless maneuverability, you'll keep your property looking its best – and you'll keep the neighbors looking on in envy.

FT Series Engines

Equipped with a Kawasaki FT651V, FT691V or FT730V engine, the ZT3000 tames tough turf with high power output and smooth operation that never relents in thick, heavy growth.

Available Deck Widths

- 48 inch
- 52 inch
- 61 inch

Accessories

- ECO Plate – excellent for debris control around landscape beds, along sidewalks and roads
- Grass Catcher: Poly-dump, 3.75 or 5.0 bushel
- Laser edge blades
- Magnetic light kit
- Mulching baffle kit
- No-flat caster wheel
- Striping kit
- Suspension kit
- ROPS kit
- ZT hitch kit

ZT3500: Get more mower for your money.

The ZT3500 gives you fast-moving, hard-mowing performance that takes your productivity to the next level.

FX Series Engines

The Kawasaki FX Series engine provides commercial-quality performance with canister air filters, smooth power output and outstanding durability.

Available Deck Widths

- 48 inch
- 52 inch
- 61 inch



Accessories

- 3.75 and 5.0 bushel poly side bag
- BOSS-Vac 8-bushel Collection System
- Canopy kit
- ECO Plate - excellent for debris control around landscape beds, along sidewalks and roads
- Laser edge blades
- Light kit, magnetic and 12V
- Mulching baffle kit
- No-flat caster options
- Striping kit
- ZT hitch kit

ZT6000: Power and performance to take on whatever the clients put in your path

The ZT6000 helps you take charge of your commercial mowing workload, giving you ample horsepower and fast-mowing capability to enhance your reputation and profits.

FX Series Engine

The Kawasaki FX801V engine provides the commercial-quality power and durability that professional mowing operations can depend on to get the job done right, every time.

Available Deck Widths

- 52 inch
- 61 inch



Accessories

- 3.75 and 5.0 bushel poly side bag
- BOSS-Vac Pro 12-bushel Collection System
- Canopy kit
- ECO Plate
- Laser edge blades
- Light kit, footplate
- Light kit, magnetic and 12V
- Mulching baffle kit
- No-flat caster options
- Striping kit
- ZT hitch kit

Commercial Mowers

ZT6100: Pick up and mow down any job that comes your way.

The ZT6100 is designed to make short work of big jobs while giving you impressive comfort, performance and ease of use – so you can maximize productivity and profit.



FX Series Engine

The Kawasaki FX850V engine provides the commercial-quality power and durability that professional mowing operations can depend on to get the job done right, every time.

Available Deck Widths

- 61 inch

Accessories

- 3.75 and 5.0 bushel poly side bag
- BOSS-Vac Pro 12-bushel Collection System
- Canopy kit
- ECO Plate - excellent for debris control around landscape beds, along sidewalks and roads
- Laser edge blades
- Light kit, footplate
- Light kit, magnetic and 12V
- Mulching baffle kits
- No-flat caster options
- Striping kit
- ZT hitch kit

ZT7000: Designed for highly productive, highly profitable mowing performance

The ZT7000 gives you all of the pro-grade power, speed and fuel capacity required for hours upon hours of unstoppable mowing power and profit-making productivity.

Engines

The Kawasaki FX1000V engine provides major commercial-grade strength for professional mowing operations.

Available Deck Widths

- 61 inch
- 72 inch

Accessories

- 3.75 and 5.0 bushel poly side bag
- BOSS-Vac Pro 12-bushel Collection System
- Canopy kit
- ECO Plate - excellent for debris control around landscape beds, along sidewalks and roads
- Laser edge blades
- Light kit, magnetic and 12V
- Mulching baffle kit
- Striping kit
- ZT hitch kit



Specifications

Model	ZT2000 42" (9992001)	ZT2000 48" (9992002)	ZT2000 52" (9992003)	ZT3000 48" (9993001)
Engine				
Model	Kaw FR651V	Kaw FR651V	Kaw FR691V	Kaw FT651V
Displacement	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)
Fuel Capacity	3.8 gal. (14.3 L)	3.8 gal. (14.3 L)	3.8 gal. (14.3 L)	3.8 gal. (14.3 L)
Air Filter	Dual Element	Dual Element	Dual Element	Dual Element
Electrical				
Charging System	15 amp	15 amp	15 amp	15 amp
Clutch	105 lb. (556 N)	105 lb. (556 N)	105 lb. (556 N)	125.0 lbf. (556 N)
Deck				
Mower Deck	DuraDeck Cutting System	TufDeck 10-gauge Top with 7-gauge Spindle Supports; 7-gauge Side Skirts	TufDeck 10-gauge Top with 7-gauge Spindle Supports; 7-gauge Side Skirts	TufDeck Pro 10-gauge Top with 7-gauge Spindle Supports; 7-gauge Side Skirts
Leading Edge	-	-	-	-
Width	42.0 in. (1066 mm)	48.0 in. (1219 mm)	52.0 in. (1320 mm)	48.0 in. (1219 mm)
Adjustable Anti-Scalp Rollers	2	3	3	3
Cutting Height	1.5-4.8 in. (38-121 mm)	1.5-4.8 in. (38-121 mm)	1.5-4.8 in. (38-121 mm)	1.5-4.8 in. (38-121 mm)
Blade Tip Speed	18,809 fpm @ 3550 Engine rpm	17,365 fpm @ 3550 Engine rpm	18,142 fpm @ 3550 Engine rpm	17,365 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer
Frame				
Front and Rear	Welded 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing	Welded 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing	Welded 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing	Welded 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing
Machine Length	76.0 in. (1930 mm)	76.0 in. (1930 mm)	76.0 in. (1930 mm)	76.0 in. (1930 mm)
Machine Weight	684 wet lb.	736 wet lb.	752 wet lb.	758 wet lb.
Transmission				
Type	HG ZT-2800 Hydrostatic Transaxles	HG ZT-2800 Hydrostatic Transaxles	HG ZT-2800 Hydrostatic Transaxles	HG ZT-3100 Hydrostatic Transaxles
Pump Displacement	.6 cu. in. (10 cc)	.6 cu. in. (10 cc)	.6 cu. in. (10 cc)	.6 cu. in. (10 cc)
Oil Capacity	1.0 gal. (4 qt)	1.0 gal. (4 qt)	1.0 gal. (4 qt)	1.0 gal. (4 qt)
Forward Speed	0-7.0 mph (0-11.2 km/hr.)	0-7.0 mph (0-11.2 km/hr.)	0-7.0 mph (0-11.2 km/hr.)	0-8.0 mph (0-12.8 km/hr.)
Reverse Speed	0-3.0 mph (0-4.8 km/hr.)	0-3.0 mph (0-4.8 km/hr.)	0-3.0 mph (0-4.8 km/hr.)	0-3.5 mph (0-5.6 km/hr.)
Wheels				
Drive Wheel Size	20 x 8.0-10	20 x 10.0-10	20 x 10.0-10	22 x 11.0-10
Front Caster Wheel Size	11 x 6.0-5	11 x 6.0-5	11 x 6.0-5	13 x 6.5-6
Caster Arm Attachment	Welded to Frame	Welded to Frame	Welded to Frame	Welded to Frame
Operator Platform				
Adjustment	-	-	-	-
Rider Pad	-	-	-	-
Vibration Isolation	-	-	-	-
Seat				
Description	High-Back, Spring Suspension Seat	High-Back, Spring Suspension Seat	High-Back, Spring Suspension Seat	High-Back, Spring Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever	Seat Slide Lever	Seat Slide Lever	Seat Slide Lever

Specifications

Model	ZT3000 52" (9993002)	ZT3000 61" (9993003)	ZT3500 48" (9993501)	ZT3500 52" (9993502)	ZT3500 61" (9993503)	ZT6000 52" (9996010)	ZT6100 61" (9996012)	ZT7000 72" (9997011)
Engine								
Model	Kaw FT691V	Kaw FT730V	Kaw FX651V	Kaw FX691V	Kaw FX730V	Kaw FX801V	Kaw FX850V	Kaw FX1000V
Displacement	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)	44.3 cu. in. (726 cc)	52.0 cu. in. (852 cc)	52.0 cu. in. (852 cc)	60.9 cu. in. (999 cc)
Fuel Capacity	3.8 gal. (14.3 L)	3.8 gal. (14.3 L)	7.8 gal. (29.5 L)	7.8 gal. (29.5 L)	7.8 gal. (29.5 L)	15 gal. (56.7 L)	15.0 gal. (56.7 L)	15.0 gal. (56.7 L)
Air Filter	Dual Element	Dual Element	Dual-Stage Canister	Dual-Stage Canister	Dual-Stage Canister	Canister Air Filter	Canister Air Filter	Canister Air Filter
Electrical								
Charging System	15 amp	15 amp	15 amp	15 amp	15 amp	15 amp	15 amp	15 amp
Clutch	125.0 lbf. (556 N)	125.0 lbf. (556 N)	125 lbf. (556 N)	125 lbf. (556 N)	125 lbf. (556 N)	225 lbf. (1000 N)	225 lbf. (1000 N)	250 lbf. (1112 N)
Deck								
Mower Deck	TufDeck Pro 10-gauge Top with 7-gauge Spindle Supports; 7-gauge Side Skirts	TufDeck Pro 10-gauge Top with 7-gauge Spindle Supports; 7-gauge Side Skirts	TufDeck Pro 10-gauge Top with 7-gauge Spindle Supports; 7-gauge Side Skirts	TufDeck Pro 10-gauge Top with 7-gauge Spindle Supports; 7-gauge Side Skirts	TufDeck Pro 10-gauge Top with 7-gauge Spindle Supports; 7-gauge Side Skirts	AirFX Cutting System	AirFX Cutting System	AirFX Cutting System
Leading Edge	-	-	-	-	-	Adjustable, Front Lip Standard	Adjustable, Front Lip Standard	Adjustable, Front Lip Standard
Width	52 in. (1320 mm)	61.0 in. (1549 mm)	48.0 in. (1219 mm)	52.0 in. (1320 mm)	61.0 in. (1549 mm)	52 in. (1320 mm)	61.0 in. (1549 mm)	72.0 in. (1828 mm)
Adjustable Anti-Scalp Rollers	3	7	3	3	7	6	6	7
Cutting Height	1.5-4.8 in. (38-121 mm)	1.5-4.8 in. (38-121 mm)	1.5-4.8 in. (38-121 mm)	1.5-4.8 in. (38-121 mm)	1.5-4.8 in. (38-121 mm)	1.0-5.5 in. (25-139 mm)	1.0-5.5 in. (25-139 mm)	1.0-5.5 in. (25-139 mm)
Blade Tip Speed	18,142 fpm @ 3550 Engine rpm	18,809 fpm @ 3550 Engine rpm	17,365 fpm @ 3550 Engine rpm	18,142 fpm @ 3550 Engine rpm	18,809 fpm @ 3550 Engine rpm	18,586 fpm @ 3550 Engine rpm	18,500 fpm @ 3550 Engine rpm	18,152 fpm @ 3550 Engine rpm
Discharge Chute	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer
Frame								
Front and Rear	Welded 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing	Welded 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing	Welded 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing	Welded 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing	Welded 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing	Welded, 0.25-inch, 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing	Welded, 0.25-inch, 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing	Welded, 0.25-inch, 7-gauge Steel; 1.5- x 2.5-inch Steel Tubing
Machine Length	76.0 in. (1930 mm)	76.0 in. (1930 mm)	76.0 in. (1930 mm)	76.0 in. (1930 mm)	79.0 in. (2006 mm)	83.0 in. (2108 mm)	83.0 in. (2108 mm)	87.0 in. (2209 mm)
Machine Weight	774 wet lb.	817 wet lb.	773 wet lb.	789 wet lb.	832 wet lb.	1371 wet lb.	1464 wet lb.	1541 wet lb.
Transmission								
Type	HG ZT-3100 Hydrostatic Transaxles	HG ZT-3100 Hydrostatic Transaxles	HG ZT-3400 Hydrostatic Transaxles	HG ZT-3400 Hydrostatic Transaxles	HG ZT-3400 Hydrostatic Transaxles	HG ZT-4400 Hydrostatic Transaxles	HG ZT-4400 Hydrostatic Transaxles	HG ZT-5400 2-Speed Hydrostatic Transaxles
Pump Displacement	.6 cu. in. (10 cc)	.6 cu. in. (10 cc)	.7 cu. in. (12 cc)	.7 cu. in. (12 cc)	.7 cu. in. (12 cc)	.7 cu. in. (12 cc)	.7 cu. in. (12 cc)	.9 cu. in. (16 cc)
Oil Capacity	1.0 gal. (4 qt)	1.0 gal. (4 qt)	1.0 gal. (4 qt)	1.0 gal. (4 qt)	1.0 gal. (4 qt)	1.1 gal. (4.5 qt) each	1.1 gal. (4.5 qt) each	1.4 gal. (5.9 qt) each
Forward Speed	0-8.0 mph (0-12.8 km/hr.)	0-8.0 mph (0-12.8 km/hr.)	0-10.0 mph (0-16.0 km/hr.)	0-10.0 mph (0-16.0 km/hr.)	0-10.0 mph (0-16.0 km/hr.)	0-12.0 mph (0-19.3 km/hr.)	0-12.0 mph (0-19.3 km/hr.)	0-19.0 mph (0-30.5 km/hr.)
Reverse Speed	0-3.5 mph (0-5.6 km/hr.)	0-3.5 mph (0-5.6 km/hr.)	0-3.5 mph (0-5.6 km/hr.)	0-3.5 mph (0-5.6 km/hr.)	0-3.5 mph (0-5.6 km/hr.)	0-4.0 mph (0-6.4 km/hr.)	0-4.0 mph (0-6.4 km/hr.)	0-7.5 mph (0-12.0 km/hr.)
Wheels								
Drive Wheel Size	22 x 11.0-10	22 x 11.0-10	23 x 10.5-12	23 x 10.5-12	23 x 10.5-12	24 x 10.5-12	24 x 12.0-12	26 x 12.0-12
Front Caster Wheel Size	13 x 6.5-6	13 x 6.5-6	13 x 6.5-6	13 x 6.5-6	13 x 6.5-6	13 x 6.5-6	13 x 6.5-6	15 x 6.5-6, No-Flat
Caster Arm Attachment	Welded to Frame	Welded to Frame	Welded to Frame	Welded to Frame	Welded to Frame	Bolt-On	Bolt-On	Bolt-On
Operator Platform								
Adjustment	-	-	-	-	-	-	-	-
Rider Pad	-	-	-	-	-	-	-	-
Vibration Isolation	-	-	-	-	-	-	-	-
Seat								
Description	High-Back, Spring Suspension Seat	High-Back, Spring Suspension Seat	High-Back, Full-Mechanical Suspension Seat	High-Back, Full-Mechanical Suspension Seat	High-Back, Full-Mechanical Suspension Seat	High-Back, Full-Mechanical Suspension Seat	High-Back, Full-Mechanical Suspension Seat	Extra-High Back, Full-Mechanical Suspension Seat
Fore-Aft Adjustment	Seat Slide Lever	Seat Slide Lever	Seat Slide Lever	-	-	Seat Slide Lever	Seat Slide Lever	Seat Slide Lever



Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors.



Bobcat is a Doosan company. Doosan is a global leader in construction equipment, power and water solutions, engines, and engineering, proudly serving customers and communities for more than a century.

Bobcat® and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries.

©2020 Bobcat Company. All rights reserved.

Kawasaki is a registered trademark of KAWASAKI HEAVY INDUSTRIES, LTD.

Bobcat Company
250 E Beaton Dr. • West Fargo, ND 58078
Bobcat.com



Bobcat®

One Tough Animal.